



SPEED-COMMANDER™ 1400 SEL¹⁹

High Performance Fabric Door

HÖRMANN

Speed-Commander™ 1400 SEL¹⁹

Latest technology for interior openings up to 14'0" w x 16'0" h


Features

Application	Interior
Model / Classification	1400 SEL¹⁹ / Fabric
Size range	Maximum 14'0" w X 16'0" h
Technology	Direct-drive, sectional panel
Operating speed	Opening 80" IPS Closing 30" IPS
Panel	Patented, sectional design, heavy-duty aluminum hinge profiles Panel: reinforced, puncture resistant 58 oz. PVC material Colors: orange, blue, yellow, red, gray and white
Vision	Full-width option, clear PVC starting approximately 52" off floor
Custom panel imprints	Logos, photos or text digitally printed onto panel. UV treated and waterproof. Maximum image size 7'0" wide X 3'0" high
Resistance to wind load	Consult factory
Guide tracks	12 ga. galvanized steel with removable cover 6" wide X 3-1/2" projection Optional: Stainless steel
Hoods	Optional: Galvanized steel or stainless steel
Safety	8'0" high light curtain built into guide tracks
Control	Smart Start™ NXT NEMA 4X UL 3-ph, 208v to 480 v (575 with transformer). Optional: 1-ph, 230 v. Consult factory for Smart Start™ NXT HFCB NEMA 3 Non-UL 1-ph, 230 v.
Activation options	Push button / Pull cord / Motion detector / Presence detector Induction loop detector (wire/sealant by others) / Remote control Touchless switch (several models) Consult factory for additional options
Accessories	LED Lite-Advance / ScanProtect / Wireless Crash Alert / Remote Keypad / Energy Analysis Report
Emergency	Standard: Hand crank. Optional: Chain hoist. Optional: UPS Emergency battery pack, Non-UL (with HFCB 1-ph control box only).
Compliance	Door complies with requirements of UL325
Warranty	5 & 2 Year: Motor/gearbox (excluding catch) and panel material 5 years, materials & workmanship. All other mechanical and electrical components free from defects, 2 years



Sectional panel with 58 oz. panel material

Horizontal aluminum profiles or spring steel wind ribs inside sewn pockets (optional) provide panel stability for light amounts of air pressure with the door in static position. A full-width vision area provides maximum visibility, and a SoftEdge bottom allows for self-repairing upon accidental impact. An aluminum bottom bar with breakaway tabs is optional for applications having slightly more air pressure.

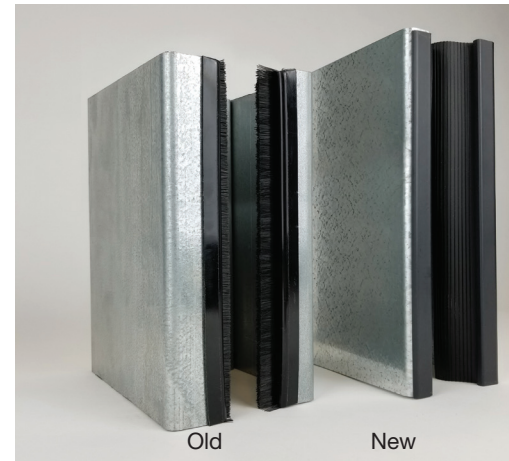

Extremely compact guide tracks

Extremely compact, heavy-duty guide tracks fit into any application. Overall dimensions: 6" wide X 3-1/2" projection.

USA

Toll Free: 800.365.3667
Email: info2@hormann.us
Website: hormann.us

Canada

Toll Free: 866.792.9968
Email: info@hormann.ca
Website: hormann.ca

